

Part Number 89SXX-XX
4 Pole, Shaded Pole Motor

Application: Evaporator
side or condensor side air
circulation

AC MOTORS

Arkansas General Industries

"RELY ON GI"



ISO 9001 CERTIFIED



4 Pole Shaded Pole Motor
CCW Rotation—Shaft End
230V 50HZ/ 1300 rpm
Insulation Class B
Temp. Rating -30°C to +50°C
Self-aligning sleeve bearings
Permanently lubricated—large oil reservoir
2x wires 0.5mm²
Die cast aluminum end bells, powder coated
Motor shaft hub—plastic adapter, bevel washer & M4 thread
Ground connection recommended

Arkansas General Industries

102 Miller St
P.O. Box 260
Bald Knob
AR 72010

Phone: 501-724-3227
Fax: 501-724-5915
Email: info@agimotors.com
www.agimotors.com

Part Number 89SXX-XX
 4 Pole, Shaded Pole Motor
 Application: Evaporator
 side or condensor side air
 circulation


Arkansas General Industries

"RELY ON GI"



ISO 9001 CERTIFIED

MT/AM/CL/459
 REV - 5
 PAGE - 3 OF 5

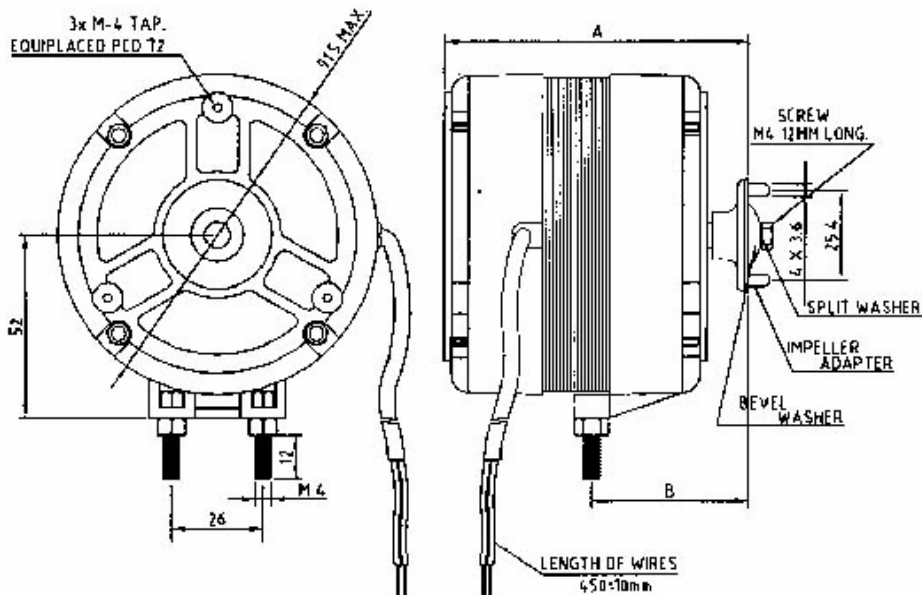

<u>Model No.</u>	<u>Dim. A</u>	<u>Dim. B</u>	<u>Power In</u>	<u>Power Out</u>	<u>Impeller Dia.</u>	<u>Impeller Angle</u>
MSP 89S10-GX	69	42	21 Watts	5 Watts	up to 200 mm	28°
MSP 89S15-HX	74	42	30 Watts	7 Watts	up to 230 mm	22°
MSP 89S19-J2	81	42	36 Watts	10 Watts	up to 230 mm	28°
MSP 89S19-J4	81	42	48 Watts	12 Watts	230mm/34°	254 mm/22°
MSP 89S25-K1	85	42	60 Watts	16 Watts	254 mm	28°
MSP 89S25-K2	86	42	75 Watts	18 Watts	254mm/34°	300 mm/22°
MSP 89S30-LX	92	42	90 Watts	23 Watts	300 mm	28°